

**SMART GU10 BULB 350LM 4.9W RGBW 2700K to 6500K TUYA CONTROL 100 BEAM INTEGRAL**

ILGU10DL133



Effortlessly transform your room with Integral Smart Light GU10. This is the ideal GU10 for a space that requires both retrofit lighting and mood lighting so you are able to adjust the tone in your room to match the activity. Control your lighting with smart device via WiFi Tuya Smart app which allows you to switch the light on or off, change the colours or simply choose white light you need from colour temperature 2700K to 6500K, and adjust the brightness. Advanced features available include scheduling options, music sync with adjustable sensitivity and multiple extra running modes.

**Details**

<b>Barcode:</b>	5055788278573
<b>Quick Order Code:</b>	'043337
<b>Category:</b>	Lamps
<b>Range Name:</b>	Smart Light
<b>Product Type:</b>	GU10
<b>Product Body Finish:</b>	Matt white
<b>Market Segment:</b>	Commercial indoor, Residential indoor
<b>Warranty (Years):</b>	2
<b>CE RoHS:</b>	Yes

**Physical Data**

<b>Product Length (mm):</b>	58
<b>Product Width (mm):</b>	50
<b>Product Weight (g):</b>	32
<b>Optic:</b>	Frosted lens
<b>Material:</b>	Aluminium and plastic
<b>Base Term:</b>	GU10
<b>Bulb Base:</b>	GU10
<b>Construction:</b>	Plastic and Aluminium heat-sink, Injection moulded diffuser
<b>Globe Finish:</b>	Frosted
<b>Bulb or Luminaire Shape:</b>	Round
<b>Placement / Application:</b>	Indoor, General Lighting
<b>Spot Type:</b>	SMD

**Electrical Data**



<b>Power (W):</b>	4.9
<b>Power Consumption (W) :</b>	4.9
<b>Power Factor:</b>	0.5
<b>Voltage Range (v):</b>	220-240
<b>Wattage equivalent (W):</b>	32
<b>Amperage (mA):</b>	34 to 43
<b>Dimming:</b>	Tuya
<b>Driver Included:</b>	Yes
<b>Electric Current:</b>	AC
<b>True Wattage Eq (W):</b>	32
<b>EN:</b>	EN-62560, EN300328
<b>LVD Certified:</b>	Yes

## Light Data

<b>Luminous Flux in Lumens (lm):</b>	350
<b>Luminous efficacy (lm/W):</b>	71
<b>Correlated Colour Temperature (CCT) (K):</b>	2700 to 6500
<b>Colour Temperature:</b>	RGB+W Tunable
<b>Colour Temperature Name:</b>	RGB+W
<b>Beam Angle:</b>	100
<b>Colour Rendering Index (CRI):</b>	80
<b>Frequency Range (Hz):</b>	50/60
<b>Instant on (Less than 1 second):</b>	Yes
<b>LED Type:</b>	Surface mounted device (SMD)
<b>Lifetime (hours):</b>	15000
<b>Switching Cycles:</b>	50000

## Environment

<b>EN:</b>	EN-62560, EN300328
<b>LVD Certified:</b>	Yes
<b>CE RoHS:</b>	Yes
<b>Previous Energy Rating:</b>	A+
<b>New Energy Rating:</b>	G
<b>Hg 0% (Mercury Free):</b>	Yes
<b>IP Rating (Ingress Protection):</b>	IP20
<b>Lowest Operating Temperature (°C):</b>	-15
<b>Maximum Operating Temperature (°C):</b>	45

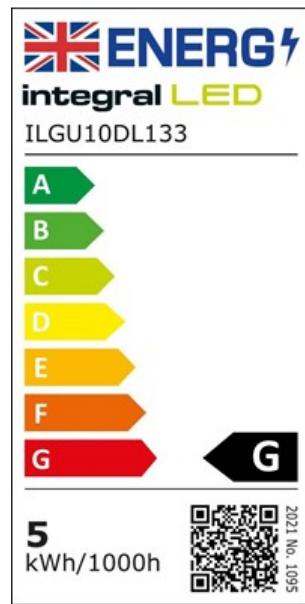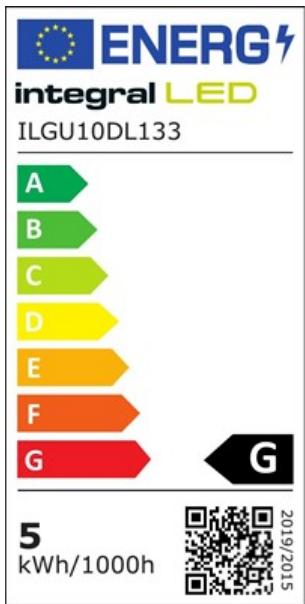

## Packaging

Package Weight (g):	42
Package Length (mm):	50
Package Width (mm):	50
Package Depth (mm):	50

[Portal.integral-led.com](http://Portal.integral-led.com)

Product Design And Specification Subject To Change Or Modification Without Notice. Image For Illustration Only. E&OE